


MAINTENANCE INSTRUCTIONS FOR NL 5192 LIQUID SPIGOT

Part #NL5192

1. Remove NL5192 spigot from container. The spigot can be removed by rotating the round nut counter clockwise and pulling the spigot out. Be sure your food supply container is empty.
2. Use mild dishwashing detergent in warm water to wash the outside and inside surfaces of the spigot. Rinse thoroughly with hot water. Allow water to flow through spigot by holding inlet under water spigot and pressing the "PUSH" lever back. Rinse entire assembly in sanitizing solution.
3. Allow spigot to air dry.
4. Should the spigot require extra maintenance, the tubular seal can be removed as follows, and we recommend this be done with every replacement of your food supply container:
 - a. Grasp seal with thumb and forefinger and squeeze the opposite sides of the seal together. See View "A."
 - b. Withdraw seal and wash body and seal as in Step 2 above.
 - c. Replace seal by wetting in sanitizing solution and folding as described in Step 4a. Push seal back in spigot body, taking care to push seal "EYE" over "PUSH" handle end. See View "B." Allow seal and spigot to dry before use.

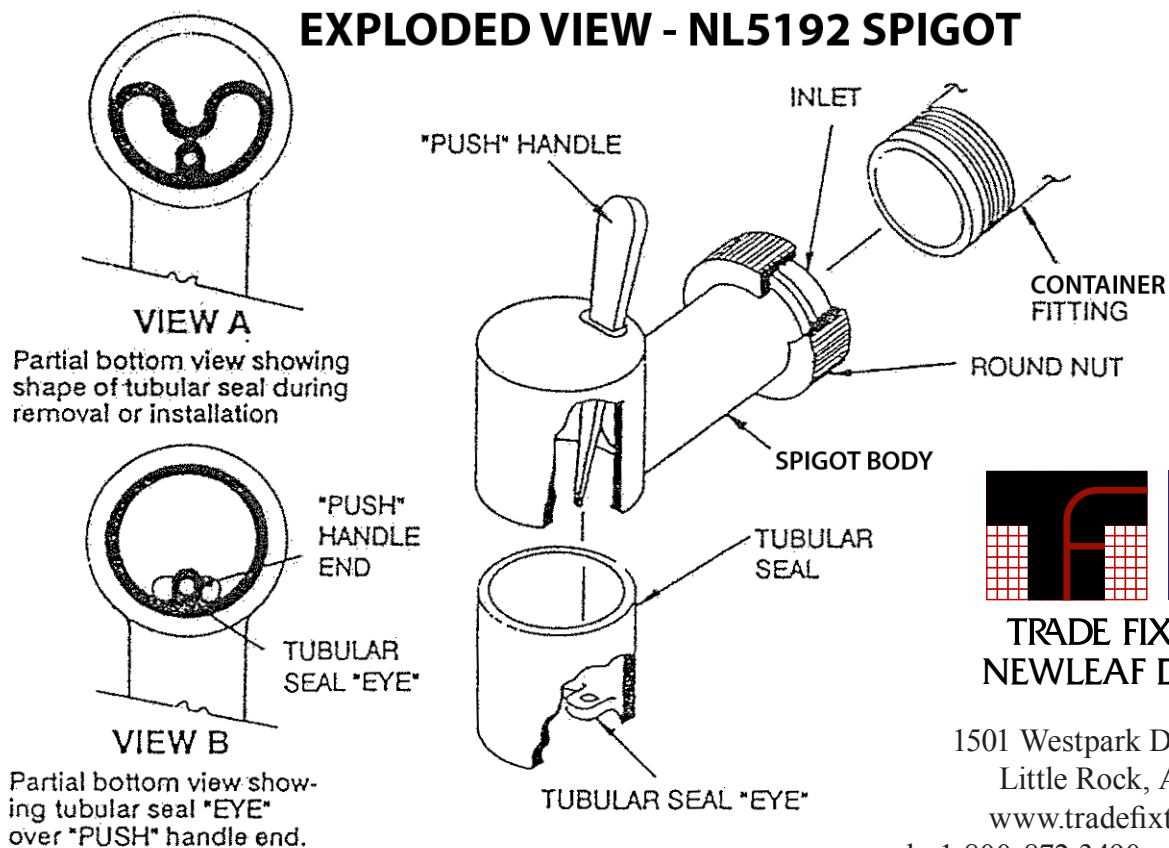

**TRADE FIXTURES™
NEWLEAF DESIGNS**

1501 Westpark Drive, Suite 5
Little Rock, Arkansas
www.tradefixtures.com
ph. 1-800-872-3490 • fx. 501-664-9253
cservice@tradefixtures.com